

Nombre / Referencia

Nombre producto

Pulsadores de alarma especiales
UNE-EN 50131



Productos / Características




Ref: C-110-L

Fabricado en plástico ABS blanco. Dimensiones: 67x67x50 mm
Contactos independientes. Pulsador e interruptor. Piloto de color verde.
Tensión de trabajo 12V. Corriente de ruptura 500 mA.



Ref: PUL-BK-BL

Fabricado en plástico ABS blanco. Dimensiones: 87,5x 87,5x 24,5 mm.
Doble salida de alarma. Rearmable mediante llave incorporada
Tensión de trabajo 12V. Corriente de ruptura 500 mA.
Tamper antisabotaje de tapa y pared

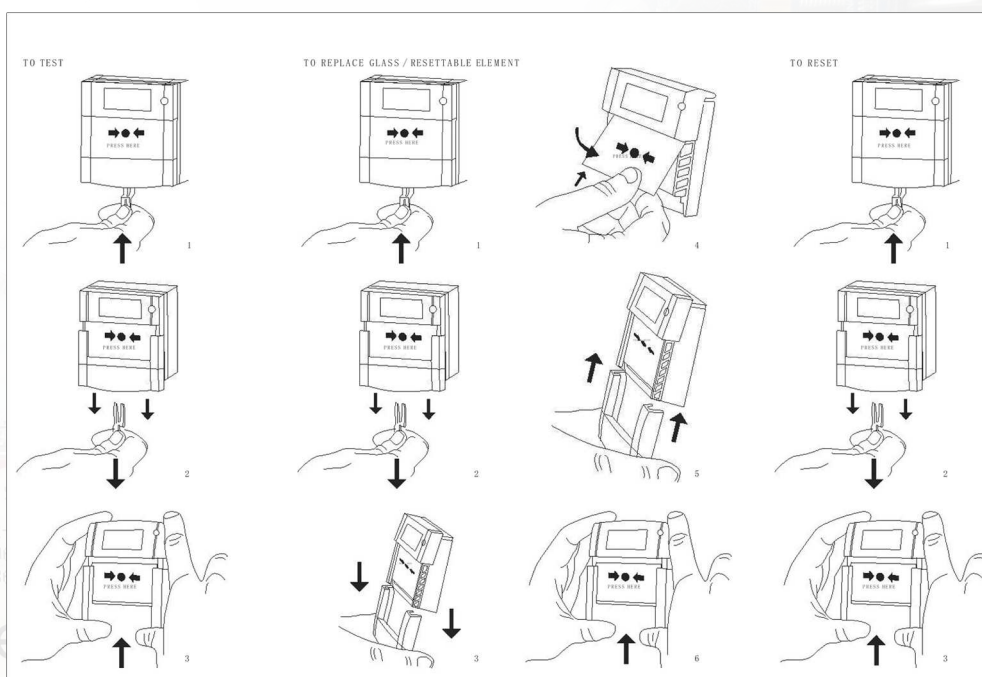

INSTALLATION INSTRUCTIONS FOR THE MANUAL CALL POINT

CONNECTION DETAILS		X(R)	X(R)B	X(R)L	X(R)LB

CONNECTION DETAILS

XS

XD

TECHNICAL DATA

- 30VDC Max
- 2A Max
- IP24D
- 110/160g
- 30 C to 70 C

Important Notes:
Please do not over tighten fixing screws. The use of lubricants, cleaning solvents or petroleum based products should be avoided.

DIMENSIONS

87.5MM, 24.5MM, 32MM, 60MM

PUSH FIT CONNECTOR

After wiring the terminal connector, plug into the appropriate position, see connection details (left).